



# BM 3022

TISCHSPRECHSTELLE



**Beschreibung**

Gooseneck microphone with hi-quality unidirectional electret capsule Direct connection to power amplifiers input through CAT5 cable Adjustable line output with RJ45 connector Switchable automatic gain control (AGC) Up to 30 BM 3022 paging microphones can be linked in a 'daisy-chain' Selectable mixing, interlocking or priority mode among devices When activating a microphone, the announcement can be preceded by a chime.

**Funktionen**

› Up to 30 BM 3022 paging microphones can be linked in a 'daisy-chain'

**Artikel-nummer**

14322013 BM 3022

Grey

EAN 8024530007034

**Spezifikationen**




Products are continually improved. All specifications are therefore subject to change without notice.



# BM 3022

## TISCHSPRECHSTELLE

Line Art 2D

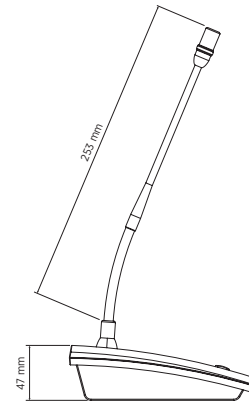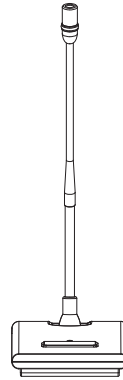

### SPEZIFIKATIONEN

#### Mikrofon-spezifikationen

Typ  
Richtcharakteristik  
Empfindlichkeit (dB)  
Frequenzgang (-3dB)  
Ausgangs-Impedanz (Ohm)  
Minimale Anschlussimpedanz  
Signal/Rausch Abstand @1kHz (dB)  
Klirrfaktor @ 1 kHz (%)

Desktop paging microphone with electret capsule  
Cardioid  
-65 dB  
200 Hz ÷ 7 kHz  
130.00 ohm  
470.00 ohm  
82.00 dB  
0.65 %

#### Technische daten der konsole

Typ:  
kompatibel mit  
General call  
Vorverstärker  
LED Anzeige

Paging  
DXT 3000  
Yes  
Yes  
Yes

#### Strombedarf

Betriebsspannung (V - Hz)  
Stromverbrauch (mA)

24.00V - Hz  
2.80 mA

#### Verbindungen

Verbinder

RJ45

#### Funktionen

Priorität  
VOX facility  
Signalton-Generator  
Smart PTT  
Automatische Gain Regelung

Yes  
Yes  
Yes  
Yes  
Yes

#### Zubehör

enthaltenes Kabel  
Kabellänge (m)

Yes  
5

#### Standardkonformität

Safety agency

CE compliant

#### Physikalische daten

Gehäuse Material  
Farbe

Plastic  
Grey

#### Größe

Höhe  
Breite  
Tiefe  
Gewicht

48 mm / 1.89 inches  
100 mm / 3.94 inches  
159 mm / 6.26 inches  
0.74 kg / 1.63 lbs