



# CMR-S 60T

## CEILING SUBWOOFER




<b>Description</b>	<p>CMR-S 60T is a ceiling subwoofer, suitable for a wide range of applications. Thanks to its elegant and discreet design and refined finishes, it is suitable for all environmental and architectural conditions. Featuring a 6.5" woofer and 80 W RMS power, it is also equipped with a transformer for connection to constant voltage lines (70/100 V). The high quality of its transducer guarantees faithful and precise low frequencies reproduction and allows to reach truly remarkable sound pressure levels for such compact product. The connection is simple and safe thanks to the removable four-pole screw terminals. The front grille is fixed by magnets and can therefore be easily removed to access the power rotary switch (the line transformer allows selection among five power rates).</p>
<b>Features</b>	<ul style="list-style-type: none"><li>› 80 W RMS power handling</li><li>› 109 dB max SPL</li><li>› 45 ÷ 250 Hz frequency range</li><li>› 180° omnidirectional coverage angle</li><li>› 6.5" high power woofer, 1.5" v.c.</li><li>› Self extinguishing plastic body and metal backcan</li><li>› Steel magnetic front grille</li><li>› 4 pole EUROBLOCK connector (audio input and parallel link output)</li><li>› 5 different power levels selectable</li></ul>
<b>Part Number</b>	13100112    CMR-S 60T W    White - RAL 9003    EAN 8024530022259



# CMR-S 60T

## CEILING SUBWOOFER

Line Art 2D

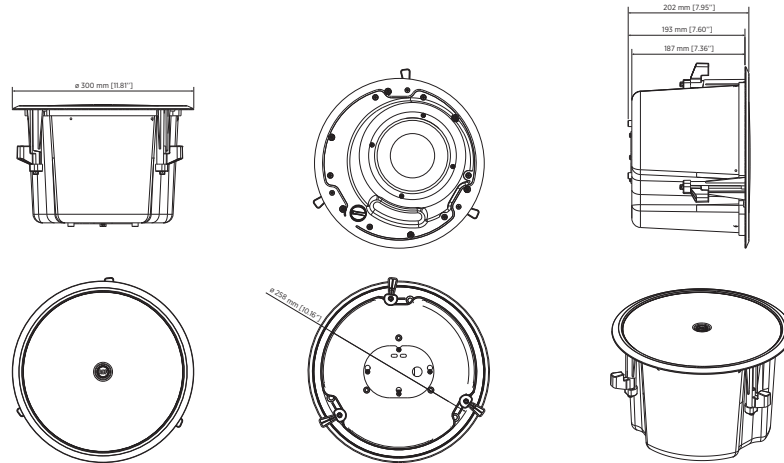

### TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response (-10dB)	45 Hz ÷ 250 Hz
	Max SPL @ 1m	109 dB
	Coverage angle	180°
	System Sensitivity	89 dB
Power section	Amplification	Full Range
	Nominal Impedance	8 ohm
	Power Handling	80 W RMS
	Peak Power Handling	320 W PEAK
	Recommended Amplifiers	DMA 504, DMA 162, DMA 82, DMA 162P
Transducers	Woofer	1 x 6.5", 1.5" v.c
Input/Output section	Input connectors	Euroblock
	Output connectors	Euroblock
	Constant Voltage Transformer	70/100 V
	Power selection 1	80 W - 125 ohm
	Power selection 2	40 W - 250 ohm
	Power selection 3	20 W - 500 ohm
	Power selection 4	10 W - 1000 ohm
	Power selection 5	5 W - 2000 ohm
Standard compliance	Safety agency	CE compliant
Physical specifications	Cabinet/Case Material	ABS
	Hardware	Steel backcan
	Grille	Steel
	Color	White - RAL 9003
Size / Weight	Depth	202 mm / 7.95 inches
	Recessed Depth	193 mm / 7.6 inches
	Diameter	300 mm / 11.81 inches
	Cut out diameter	260 mm / 10.24 inches
	Weight	4.5 kg / 9.92 lbs



# CMR-S 60T

CEILING SUBWOOFER

Rigging / Mounting	-	<b>ACCESSORIES</b>	
		13360492 GRILLE KIT 4X CMR B	Black - RAL 9005    EAN 8024530019402
		<b>FLYING BRACKETS</b>	
		13360490 MUD RING 4X CMR	EAN 8024530019396
		13360489 TILE BRIDGE 4X CMR	EAN 8024530019389