



KX 08-A

HIGH-PERFORMANCE 2-WAY POINT-SOURCE ACTIVE SPEAKER



Description

The KX 08-A is a compact, high-output 2-way active speaker system engineered for professional users, combining precise directivity, high SPL capability, and advanced system integration. The low-frequency section features an 8" neodymium driver in a bass-reflex design; the high-frequency section comprises a neodymium compression driver with a 1.75" PKX dome, coupled to a 90° x 70° True Resistive Waveguide, rotatable by 90° to ensure flexible coverage options. An integrated two-channel 2000 W Class D amplifier with proprietary DSP processing and remote management via RDNet enables optimal system performance. Its weatherproof, multifunctional enclosure with Quick Fit and M10 inserts supports versatile deployment for ground-stacked, pole-mounted, or flown applications.

Features

- › 128 dB SPL Max
- › Rotatable 90° x 70° TRW horn
- › 8" neodymium woofer, 2.5" voice coil
- › 1,75" PKX dome, neodymium compression driver
- › Two-channel, 2000W Class-D amplifier
- › DSP Processing with FIRPHASE and BMC
- › RDNet Networked Management
- › powerCON TRUE1 TOP mains connectors

Part Number

13000900 KX 08-A

220-240 V

Black


EAN 8024530022808



KX 08-A

HIGH-PERFORMANCE 2-WAY POINT-SOURCE ACTIVE SPEAKER

Line Art 2D

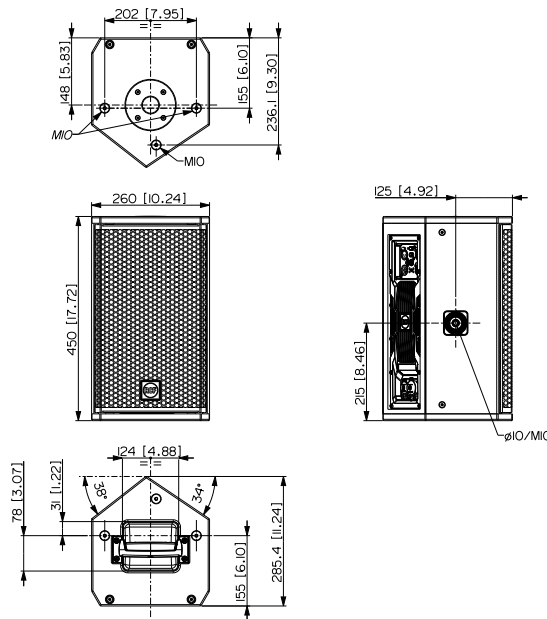

TECHNICAL SPECIFICATIONS

Acoustical specifications

Frequency Response 65 Hz ÷ 20000 Hz
 Max SPL @ 1m 128 dB
 Horizontal coverage angle 90°
 Vertical coverage angle 70°

Transducers

Compression Driver 1 x 1.0" neo, 1.75" v.c
 Woofer 1 x 8" neo, 2.5" v.c

Input/Output section

Input signal bal/unbal
 Input connectors XLR, RDNet Ethercon
 Output connectors XLR, RDNet Ethercon
 Input sensitivity -2 dBu/+4 dBu

Processor section

Crossover Frequencies 1400Hz
 Protections Thermal, HF
 Limiter Fast Limiter
 Controls Bypass, Linear/High Pass, Volume
 RDNet Onboard

Power section

Total Power 2000 W Peak
 High frequencies 600 W Peak
 Mid frequencies 1400 W Peak
 Cooling Convection
 Connections Powercon TRUE1 TOP IN/OUT

Standard compliance

Safety agency CE compliant

Physical specifications

Cabinet/Case Material Baltic birch plywood
 Hardware 3X M10 TOP AND BOTTOM
 2X PIN D.10 AND M10 SIDE
 Handles 1 TOP
 Pole mount/Cap 35 mm insert
 Grille Steel with clothing
 Color Black



KX 08-A

HIGH-PERFORMANCE 2-WAY POINT-SOURCE ACTIVE SPEAKER

Size / Weight	Height	450 mm / 17.72 inches	
	Width	260 mm / 10.24 inches	
	Depth	285.4 mm / 11.24 inches	
	Weight	11 kg / 24.25 lbs	
Rigging / Mounting	ACCESSORIES		
	FLOOR STANDS		
	13360109 AC PRO-FS	Black	EAN 8024530006471
	FLYING BRACKETS		
	13360031 AC EB 4X		EAN 8024530018870
	HORIZONTAL BRACKETS		
	13360714 HBR60714	Black	EAN 8024530023171
	POLE MOUNT KITS		
	13360232 AC PMX		EAN 8024530010058
	13360110 AC PRO-PM	Black	EAN 8024530006488
	13360067 PM-KIT M20	Black	EAN 8024530014599
	VERTICAL BRACKETS		
	13360715 VBR60715	Black	EAN 8024530023188
Protections	COVERS		
	13360713 CVR60713	Black	EAN 8024530023164
	RAIN PROTECTIONS		
13360689 RPR60689	Black	EAN 8024530022914	
Cables	CABLES KIT		
	13360102 AC XLR 3M3F		EAN 8024530006402