



# NX 910-A

PROFESSIONAL ACTIVE SPEAKER



## Description

NX 910-A is masterfully engineered from the ground up to deliver stellar audio performance for solo musicians, bands, and DJs. The combination of 1.75" compression driver, 10" woofer, two-channel 2100W amplifier, and a constant directivity waveguide produces coherent 100° x 60° coverage for the listening area with up to 130 dB SPL of distortion-free sound. Used as a stand-alone speaker for a FOH system, satellite (with subwoofer), stage monitor, or flown speaker, the NX 910-A blends high-performance and reliability in a compact package. Blending RCF proprietary FIRPHASE and Bass Motion Control DSP processing, NX 9 Series speakers are perfectly tuned for each model, delivering absolute clarity and deep, powerful bass response. The tour-ready, rugged all-wood cabinet is easy to carry and secure to install on a pole-, flown-, wall-, or truss-mounted using the dedicated rigging points available.

## Features

- › Up to 130 dB Sound Pressure Level
- › 2100W Class-D Bi-Amplification
- › 50-20000 Hz linear frequency response
- › 1.75" Compression Driver
- › 10" Woofer
- › FIRPHASE zero degrees phase technology
- › Bass Motion Control woofer excursion management

## Part Number

13000668 NX 910-A  
13000688 NX 910-A

220-240 V  
115 V

Black  
Black


EAN 8024530019020  
EAN 8024530019037



# NX 910-A

## PROFESSIONAL ACTIVE SPEAKER

Line Art 2D

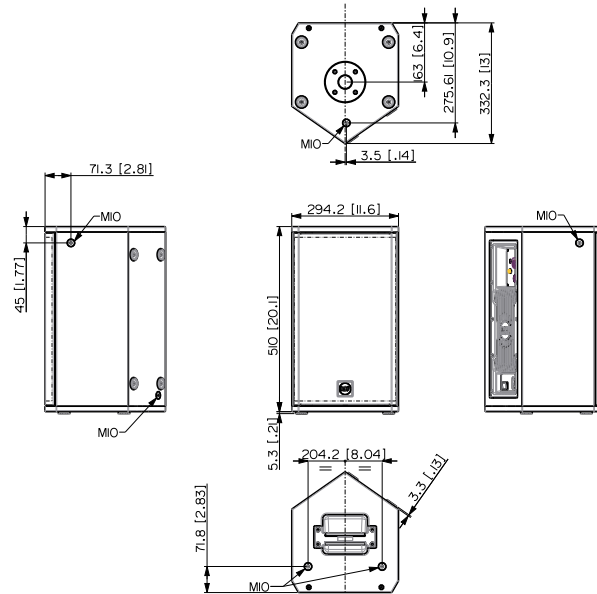

### TECHNICAL SPECIFICATIONS

<b>Acoustical specifications</b>	Frequency Response	50 Hz ÷ 20000 Hz
	Max SPL @ 1m	130 dB
	Horizontal coverage angle	100°
	Vertical coverage angle	60°
<b>Transducers</b>	Compression Driver	1 x 1.0", 1.75" v.c
	Woofer	1 x 10", 2.5" v.c
<b>Input/Output section</b>	Input signal	bal/unbal
	Input connectors	XLR, Jack
	Output connectors	XLR
	Input sensitivity	-2 dBu/+4 dBu
<b>Processor section</b>	Crossover Frequencies	1600 Hz
	Protections	Thermal, RMS
	Limiter	Soft Limiter
<b>Power section</b>	Controls	Linear, Boost, Stage, Volume
	Total Power	2100 W Peak
	High frequencies	700 W Peak
	Low frequencies	1400 W Peak
<b>Standard compliance</b>	Cooling	Convection
	Connections	VDE
	Safety agency	CE compliant
	<b>Physical specifications</b>	Cabinet/Case Material
Hardware		2 x M10 Top, 1 x M10 each side, 1 x M10 bottom, 1 x M10 rear
Handles		1 Top
Pole mount/Cap		Yes
Grille		Steel
Color		Black
<b>Size</b>		Height
	Width	295 mm / 11.61 inches
	Depth	333 mm / 13.11 inches
	Weight	16.4 kg / 36.16 lbs



# NX 910-A

PROFESSIONAL ACTIVE SPEAKER

## ACCESSORIES

<b>Cables</b>	AC XLR 3M3F	13360102		8024530006402
<b>Protections</b>	CVR NX 910	13360495	Black	8024530019488
<b>Rigging / Mounting</b>	2X PLATE H-BR NX 910-912-915	13360506	Black	8024530020057
	AC EB 4X	13360031		8024530018870
	AC PMX	13360232		8024530010058
	AC PRO-FS	13360109	Black	8024530006471
	AC PRO-PM	13360110	Black	8024530006488
	H-BR 007	13360551	Black - RAL 9005	8024530021641
	PM-KIT M20	13360067	Black	8024530014599