



NXL 14-A

COMPACT ACTIVE POINT SOURCE SPEAKER



Description

NXL 14-A is the most compact active speaker in the professional NXL series. It features two 6" woofers in a symmetrical configuration and the new 1.75" Precision Transducers PKX driver loaded on a rotatable TRW waveguide, all powered by a 2,100W two-channel amplifier. Available in black or white finish, the NXL 14-A is designed to deliver definition, power, and portability in any live application. Perfect for vocal reproduction, ideal in compact live systems paired with SUB Series subwoofers, in immersive setups, or as a fill speaker.

Features

- › 128 dB max SPL
- › 2100W Class-D Bi-Amplification
- › 70-20000 Hz linear frequency range
- › 1.75" PKX / Neodymium Compression Driver
- › 2 x 6" High Power Neodymium Woofers
- › Rotatable 100° x 70° TRW Waveguide
- › FIRPHASE and Bass Motion Control

Part Number


| | | | |
|---------------------|-----------|------------------|-------------------|
| 13000888 NXL 14-A | 220-240 V | Black - RAL 9005 | EAN 8024530022006 |
| 13000891 NXL 14-A W | 220-240 V | White - RAL 9003 | EAN 8024530022013 |
| 13000892 NXL 14-A | 100-120 V | Black - RAL 9005 | EAN 8024530022204 |
| 13000893 NXL 14-A W | 100-120 V | White - RAL 9003 | EAN 8024530022211 |



NXL 14-A

COMPACT ACTIVE POINT SOURCE SPEAKER

Line Art 2D

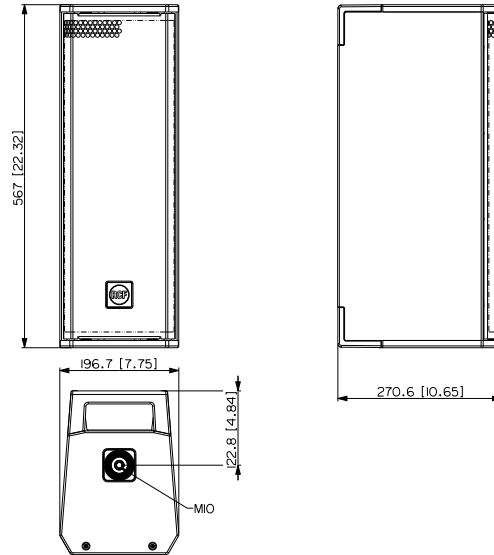

TECHNICAL SPECIFICATIONS

| | | |
|----------------------------------|---------------------------|--------------------------------------|
| Acoustical specifications | Frequency Response | 70 Hz ÷ 20000 Hz |
| | Max SPL @ 1m | 128 dB |
| | Horizontal coverage angle | 100° |
| | Vertical coverage angle | 70° |
| Transducers | Compression Driver | 1 x 1.0" neo, 1.75" v.c |
| | Woofer | 2 x 6.0" neo, 2.0" v.c |
| Input/Output section | Input signal | bal/unbal |
| | Input connectors | Combo XLR/Jack |
| | Output connectors | XLR |
| | Input sensitivity | -2 dBu/+4 dBu |
| Processor section | Crossover Frequencies | 1200 |
| | Protections | Excurs. |
| | Limiter | Fast Limiter |
| | Controls | Linear/Boost/Stage Presets, Volume. |
| Power section | Total Power | 2100 W Peak |
| | High frequencies | 700 W Peak |
| | Low frequencies | 1400 W Peak |
| | Cooling | Convection |
| | Connections | Powercon TRUE1 TOP IN/OUT |
| Standard compliance | Safety agency | CE compliant |
| Physical specifications | Cabinet/Case Material | Plywood |
| | Hardware | 2X M10 TOP AND BOTTOM 2X PIN D.10 |
| Size | Handles | 2 TOP AND BOTTOM |
| | Grille | Steel |
| | Color | Black - RAL 9005, White - RAL 9003 |
| | Height | 567 mm / 22.32 inches |
| | Width | 197 mm / 7.76 inches |
| | Depth | 270 mm / 10.63 inches |
| | Weight | 12.8 kg / 28.22 lbs |



NXL 14-A

COMPACT ACTIVE POINT SOURCE SPEAKER

| | ACCESSORIES | | | |
|---------------------------|--------------------|----------|-------|---------------|
| Cables | AC XLR 3M3F | 13360102 | | 8024530006402 |
| Protections | CVR60685 | 13360685 | Black | 8024530022556 |
| Rigging / Mounting | AC PMX | 13360232 | | 8024530010058 |
| | AC PRO-FS | 13360109 | Black | 8024530006471 |
| | AC PRO-PM | 13360110 | Black | 8024530006488 |
| | HBR60683 | 13360683 | Black | 8024530022518 |
| | HBR60684 | 13360684 | White | 8024530022525 |
| | PMK60678 | 13360678 | Black | 8024530022563 |
| | PMK60679 | 13360679 | White | 8024530022570 |
| | PM-KIT M20 | 13360638 | White | 8024530022303 |
| | PM-KIT M20 | 13360067 | Black | 8024530014599 |
| | VBR60681 | 13360681 | Black | 8024530022532 |
| | VBR60682 | 13360682 | White | 8024530022549 |