



### Description

The full-range passive two-way speaker X-MAX 12 has been specifically designed as club systems for entertainment, to achieve the best nearfield quality, vocal coherence and a stable tonal balance even at high volume. The heavy-duty speaker cabinet is made of plywood coated with black textured acrylic paint. Featuring a 12" woofer with a 2.5" voice and a 1.0" compression driver with 1.4" voice coil. The LICC crossover design includes an electronic protection on high-frequency device. The rotatable 90°x70° horn allows installation either vertically or horizontally in any environment and architectural constraint.

#### Features

- > 800 W program power handling
- > 129 dB max SPL
- > 60 ÷ 20000 Hz frequency range
- > 90° x 70° constant directivity coverage angle
- > 1 x 12" high power woofer
- > 1 x 1.4" voice coil compression driver
- > High quality plywood cabinet
- > Installation points available on rear, top and bottom panels

**Part Number** 

13000658 X-MAX 12

Black


EAN 8024530018368



# **X-MAX 12**

## HIGH POWER TWO-WAY SPEAKER

### Line Art 2D

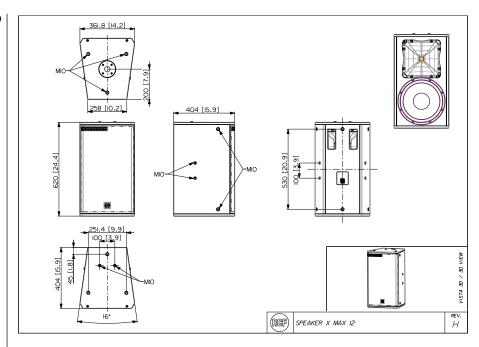

129 dB

97 dB

Dynamic active mosfet

### **TECHNICAL SPECIFICATIONS**

**Acoustical specifications** 

Frequency Response (-10dB) 60 Hz ÷ 20000 Hz

Max SPL @ 1m

Horizontal coverage angle 90°
Vertical coverage angle 70°
Directivity index Q 9

System Sensitivity

**Power section** Amplification

**Transducers** 

Amplification Full Range
Nominal Impedance 8 ohm
Power Handling 400 W
Peak Power Handling 1600 W PEAK

Protections

Crossover Frequencies 1800 Hz

ossover i requericies 1000

Compression Driver  $1 \times 1.0^{\circ}$ ,  $1.4^{\circ}$  v.c Woofer  $1 \times 12^{\circ}$ ,  $2.5^{\circ}$  v.c

Input/Output section Input connectors Speakon

 Standard compliance
 Safety agency
 CE compliant

 Physical specifications
 Cabinet/Case Material
 Plywood

Cabinet/Case Material Plywood
Hardware 2 x M8, 16 x M10
Pole mount/Cap 35 mm insert

Grille Steel with clothing

Color Black

 Size
 Height
 620 mm / 24.41 inches

 Width
 362 mm / 14.25 inches

 Depth
 404 mm / 15.91 inches

Weight 22 kg / 48.5 lbs

Technical Specifications Page 2 of 2