




AT 20T

CONSTANT VOLTAGE LINE VOLUME CONTROL

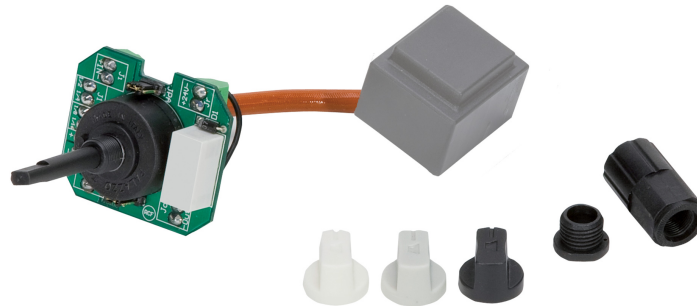

Description

AT 20T volume control is made of a control circuit having a 6 position (5 + off) selector and a separated transformer. It can be used in 100 V line systems to adjust the volume level of a loudspeaker group having a total power not exceeding 20 W. All connected loudspeakers shall have 100 V line matching transformers. It can be set (through an internal jumper) to operate with 3 wire lines (in order to make emergency announcements at the max. volume). It can be installed on whichever supporting frame for home / office electrical systems by drilling a hole in a blank key and fixing its control circuit. 3 knobs are included in 3 different colours: white, silver, anthracite. The transformer can be put inside the wall / flush-mounted box (where the control circuit is).

Features

- › 6 positions volume control
- › 20 W separated transformer
- › Installable on whichever supporting frame for home
- › 3 knobs included: white, silver, anthracite

Part Number

13160033 AT 20T

EAN 8024530005979



AT 20T

CONSTANT VOLTAGE LINE VOLUME CONTROL

		TECHNICAL SPECIFICATIONS
General specifications	Input voltage:	100 V
	Output voltage:	100 V - 70 V - 50 V - 35 V - 25 V - 0 V
	Maximum power:	20 W
	Attenuation:	0 dB - 3 dB - 6 dB - 9 dB - 12 dB - OFF
Standard compliance	Safety agency	CE compliant
Size	Height	53 mm / 2.09 inches
	Width	35 mm / 1.38 inches
	Depth	68 mm / 2.68 inches
	Weight	0.16 kg / 0.35 lbs